


# Compact Cassette



## Comfortable air flow


### 4 step swing

Auto air flow direction and auto swing

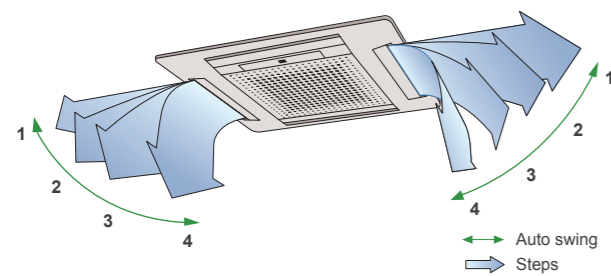


### 2-4 way air flow system

Select 2-way, 3-way or 4-way air flow to suit your needs.

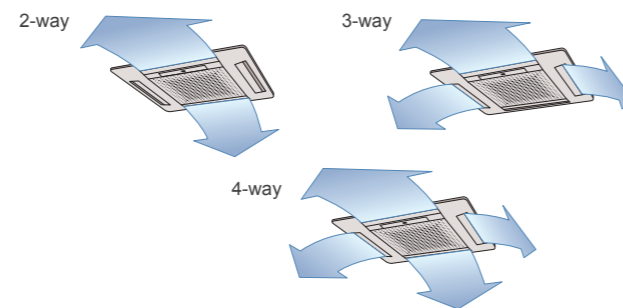


## Duct connection hole opening

Fresh air can be introduced through this opening

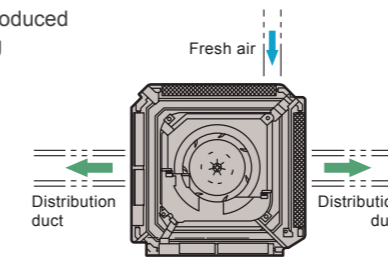


Conditioned air can be distributed by means of a distribution duct

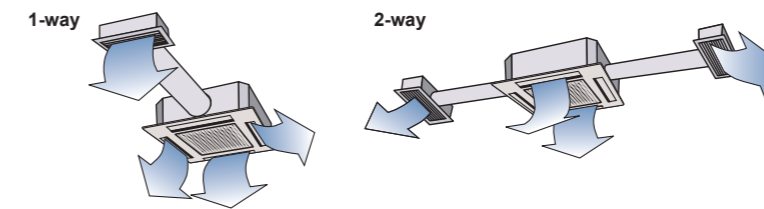


## Compact size


Compact grille fits European ceiling panel (650 x 650 mm)

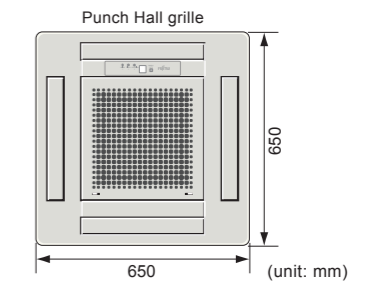

Condensate pump lift to 400mm

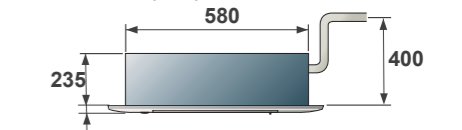

## Additional grille (optional parts)

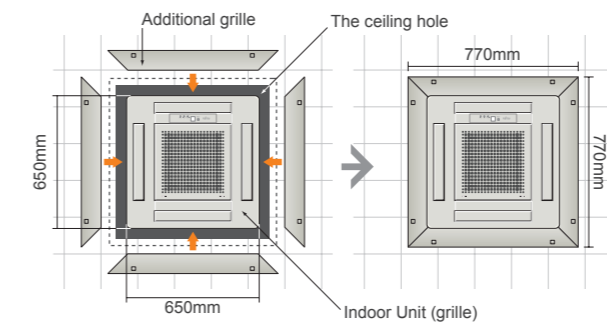

## Optional parts

Additional Grille: UTG-AGDA-W

## Specifications

Model No.	Indoor unit		AUY12UB	AUY14UB	AUY18UB
	Outdoor unit		AOY12UB	AOY14UB	AOY18UB
Power Source	V/Ø/Hz		230/1/50	230/1/50	230/1/50
Capacity	Cooling	kW	3.55	3.95	4.85
	Heating	kW	4.00	4.60	5.40
Input Power	Cooling/Heating		1.24/1.21	1.40/1.42	1.85/2.00
EER - Energy Class	Cooling	W/W	2.86-C	2.82-C	2.62-D
COP - Energy Class	Heating		3.31-C	3.24-C	2.70-E
Running Current	Cooling/Heating		5.5/5.4	6.3/6.3	8.2/9.2
Moisture Removal	l/h		1.3	1.5	2.1
Noise (Indoor)	Cooling	H/M/L	42/39/36	42/39/36	44/41/37
Noise (Outdoor)	Cooling		49	49	52
Airflow Rate (High)	Indoor/Outdoor		m³/h	550/1600	550/1600
Net Dimension H x W x D	Indoor / Grille		mm	235x580x580	235x580x580
			kg(lbs)	18(40)	18(40)
	Outdoor		mm	530x750x250	530x750x250
Piping Connections (Small / Large)			mm	6.35/9.52	6.35/12.70
			m	20	20
Max Pipe Length (Chargeless)			m	8	8
Operation Range	Cooling	°CDB	0~43	0~43	0~43
	Heating		-7~24	-7~24	-7~24
Refrigerant			R410A	R410A	R410A
Grille			UTG-UDYD-W	UTG-UDYD-W	UTG-UDYD-W

## Dimensions Models: AUY12UB / AUY14UB / AUY18UB

(Unit : mm)

