

PRODUCT LINEUP: SPLIT

Wall Mounted  
ECO Range  
Compact & Comfort



Model: ASYG07LLCE / ASYG09LLCE / ASYG12LLCE




Wireless R.C.



Specifications


Model No.	Indoor unit		ASYG07LLCE	ASYG09LLCE	ASYG12LLCE
	Outdoor unit		AOYG07LLCE	AOYG09LLCE	AOYG12LLCE
Power Source			Single-phase, ~230V, 50Hz		
Capacity	Cooling	kW	2.0(0.9-2.8)	2.5(0.9-3.0)	3.4(0.9-3.8)
	Heating		2.7(0.9-3.6)	3.0(0.9-3.8)	4.0(0.9-5.0)
Input Power	Cooling/Heating	kW	0.470(0.620)	0.730(0.740)	1.080(1.130)
	Cooling		4.26	3.42	3.15
EER	Cooling	W/W	4.35	4.05	3.54
	Heating		2.0(2.2)	2.5(2.3)	3.4(3.2)
Pdesign	Cooling/Heating(-10°C)	kW	6.70	6.90	6.60
	SEER	W/W	4.00	4.00	3.80
SCOP	Heating (Average)		A+	A+	A+
	Cooling		A+	A+	A
Class	Heating (Average)		6.0/7.5	6.0/7.5	6.5/9.0
	Cooling/Heating	A	104	127	180
Max. Operating Current	Cooling	kWh/a	770	805	1,179
	Heating		1.0	1.3	1.8
Annual Energy Consumption	Cooling	l/h	43/38/33/22	43/38/33/22	43/38/33/22
	Heating		43/38/33/22	43/38/33/22	43/38/33/22
Moisture Removal	Indoor (Cooling)	H/M/L/O	47/48	47/48	50/51
	Indoor (Heating)	H/M/L/O	59/60	59/60	65/65
Sound Pressure Level	Outdoor(Cooling/Heating)	High	61/61	61/61	65/65
	Indoor(Cooling/Heating)	High	720(1.670)	720(1.670)	720(1.830)
Sound Power Level	Indoor(Cooling/Heating)	High	262-820-206	262-820-206	262-820-206
	Outdoor(Cooling/Heating)	High	7.0(15)	7.0(15)	7.0(15)
Airflow Rate	Indoor / Outdoor	High	535-663-293	535-663-293	535-663-293
	Indoor	kg(lbs)	24(53)	24(53)	26(57)
Net Dimensions H x W x D	Indoor	mm	6.35/9.52	6.35/9.52	6.35/9.52
	Outdoor	mm	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Weight	Indoor	m	20(15)	20(15)	20(15)
	Outdoor	kg(lbs)	15	15	15
Connection Pipe Diameter (Liquid / Gas)	Cooling	°CDB	-10 to 43	-10 to 43	-10 to 43
	Heating		-15 to 24	-15 to 24	-15 to 24
Drain hose Diameter (I.D./O.D.)	Type (Global Warming Potential)		R410A(2.088)	R410A(2.088)	R410A(2.088)
	Charge	kg(CO2eq-T)	0.65(1.4)	0.65(1.4)	0.85(1.8)
Max Pipe Length (Pre-Charge)					
Max Height Difference					
Operation Range					
Refrigerant					

High efficient compact design

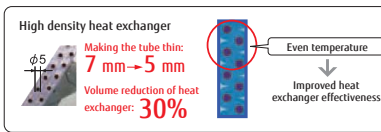


ON-OFF Programmable timer

You can set an integrated ON-OFF or OFF-ON timer suitable for your life style. (Setting time: 0.5, 1, 1.5, 2, 2.5, -----9.5, 10, 11, 12 hours)

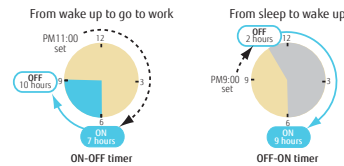


Powerful operation

20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.




Economy operation

Setting temp. is shifted by 1°C automatically.

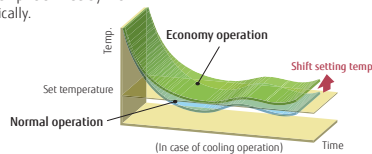

Low ambient operation

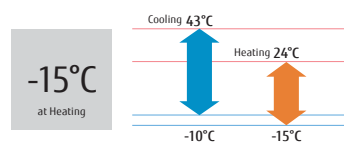

Optional parts

Remote Controller Holder: UTZ-RXLA

Dimensions

(Unit : mm)

